


**Specifically Designed For
Gas Heat PTAC Application**

Our commercial duty construction with heavy gauge galvanized steel and superior components create an efficient reliable unit. This design eliminates the need for any interior or exterior renovation. If the need does occur where the duct kit, sub-base/skirt, wall sleeve cabinet and/or louver needs to be replaced, we manufacture these accessories as well. This unit is also used extensively for new construction projects where gas heat is preferred.



FEATURES


- Proudly Assembled in the U.S.A.
- ETL listed product
- Superior Energy Efficiency Ratios (EERs)
- Commercial Duty Construction with Heavy Gauge Galvanized Steel
- Designed for exact replacement of existing sleeve opening
- Energy Efficient Rotary Compressors
- P.S.C. Evaporator and Condenser Motors
- High-Efficiency Refrigeration Coils Used to Provide Superior Heat Transfer
- Units Available as Cooling only, Cooling with Natural Gas Heat or L.P. Gas Heat
- Custom Options Available
- Available with wired and wireless wall thermostats
- NYC MEA Number 358-93-E Vol. II

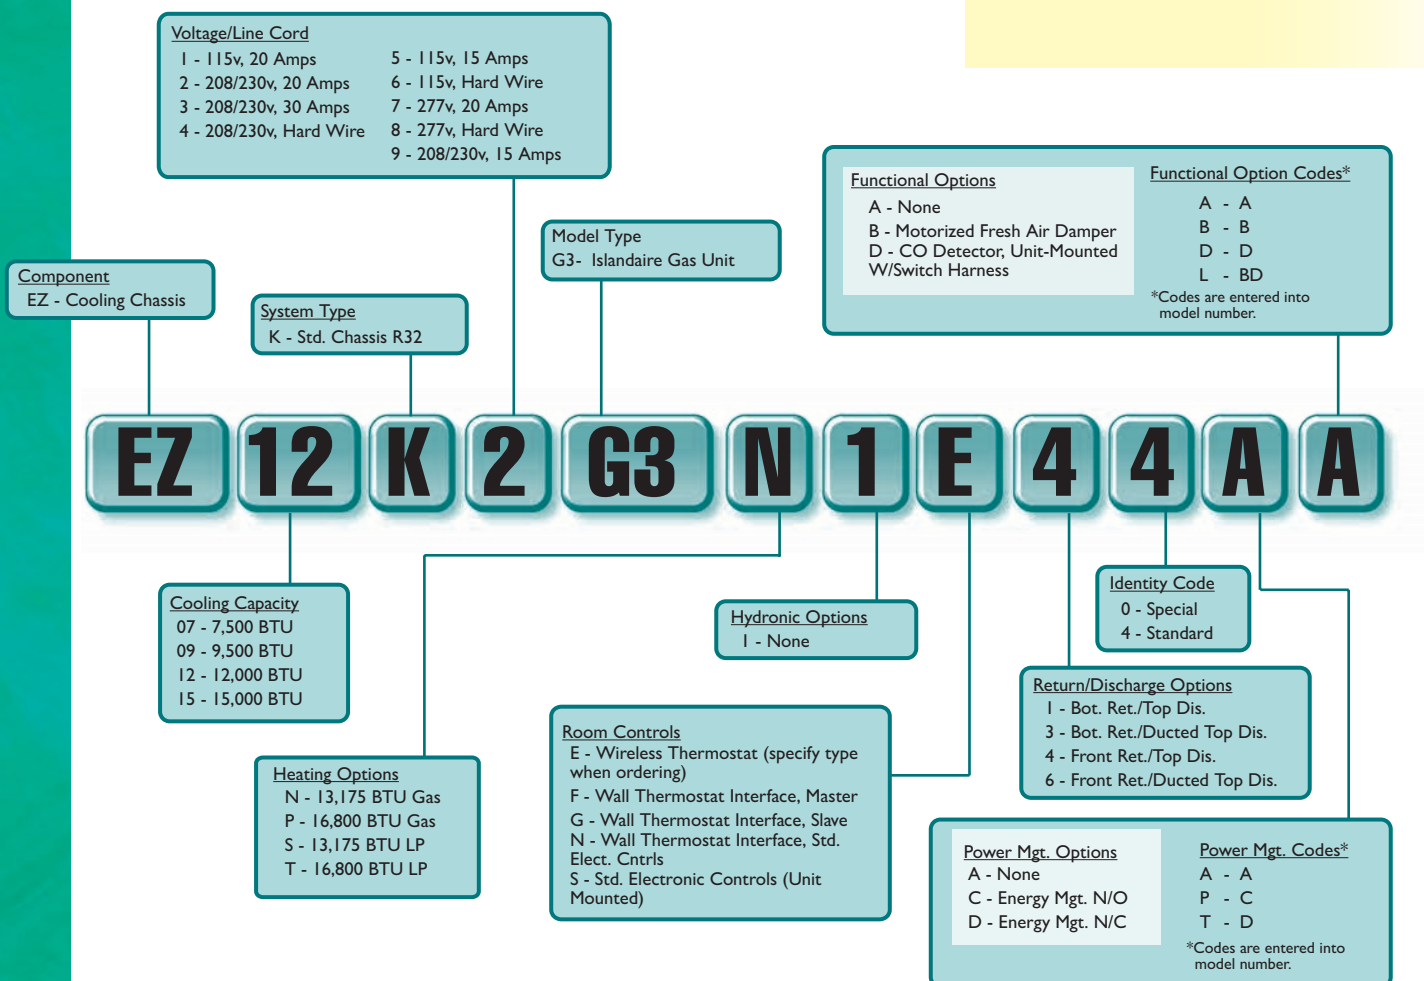

*Specifications are subject to change due to ongoing product development.

6140586 Rev. - (11/22/24)

500 Middle Country Road, St. James, NY 11780 • 1-800-886-2759
e-mail: sales@islandaire.com • www.islandaire.com
Ph: 631-471-2900 • Fax: 631-471-2913

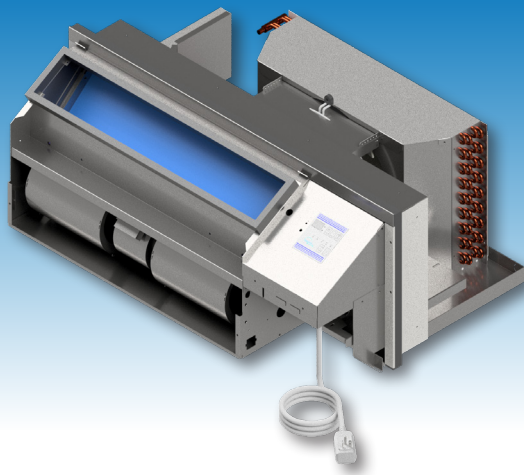

MODELS

	EZ07			EZ09			EZ12			EZ15	
VOLTS	115	208 / 230	277	115	208 / 230	277	115	208 / 230	277	208 / 230	277
BTUH COOL	7,000	7,000	7,000	9,200	9,600	9,400	11,800	11,800	11,500	14,500	14,500
AMPS COOL	6.39	3.53 / 3.20	2.65	8.87	4.90 / 4.43	3.77	12.22	6.44 / 5.83	4.89	8.73 / 7.89	6.62
WATTS COOL	735	735	735	1,020	1,020	1,045	1,405	1,340	1,355	1,815	1,835
EER	9.5	9.5	9.5	9.0	9.4	9.0	8.4	8.8	8.5	8.0	7.9
HIGH COOL CFM (m³/min)	375 (10.6)	375 (10.6)	375 (10.6)	400 (11.3)	400 (11.3)	400 (11.3)	425 (12.0)	425 (12.0)	425 (12.0)	450 (12.7)	450 (12.7)
LOW COOL/HEAT CFM (m³/min)	320(9.0)	320 (9.1)	320 (9.0)	350 (9.9)	350 (9.9)	350 (9.9)	350 (9.9)	350 (9.9)	350 (9.9)	400 (11.3)	400 (11.3)
BTUH HEATING	6,800	6,800	6,800	9,000	9,400	9,200	11,000	11,000	11,500	13,500	13,500
WATTS HEATING	710	710	710	975	985	1,000	1,240	1,110	1,250	1,520	1,520
C.O.P.	2.8	2.8	2.8	2.7	2.8	2.7	2.6	2.9	2.7	2.6	2.6


* CFM values are dry coil (not in cooling mode).

HEATING OPTIONS - Available with any cooling unit

	N & S				P & T			
Input BTUH Heat	15,500	15,500	15,500	15,500	20,000	20,000	20,000	20,000
Output BTUH Heat	13,175	13,175	13,175	13,175	16,800	16,800	16,800	16,800
Volts	115	208	230	277	115	208	230	277
Watts Heat	143	150	166	166	143	150	166	166
Thermal Efficiency	85.0	85.0	85.0	85.0	84.0	84.0	84.0	84.0
Amps Heat	1.24	0.72	0.72	0.60	1.24	0.72	0.72	0.60


Where applicable, cooling capacities are specified at conditions of 95 °F DB/75 °F WB (35 °C DB/24 °C WB) outdoor and 80 °F DB/67 °F WB (27 °C DB/19 °C WB) indoor and heating capacities are specified at conditions of 47 °F DB/43 °F WB (8 °C DB/6 °C WB) outdoor and 70 °F DB/60 °F WB (21 °C DB/16 °C WB) indoor in accordance with AHRI 310/380 and CSA C744 standards. Wattage, Amperage, EER, and COP listings include compressor, evaporator motor and condenser fan motor. The above ratings are a typical heat pump style unit.

Line Voltage	Maximum Amperage	Wall Socket Configuration	Receptacle Number	Electrical Heat Options
115	12		NEMA 5-15R	1.3
115	16		NEMA 5-20R	1.7
208/230	12		NEMA 6-15R	2.5
208/230	16		NEMA 6-20R	3.6
208/230	24		NEMA 6-30R	4.2 - 5.0
277	16		NEMA 7-20R	2.5 - 4.2
277	24		NEMA 7-30R	5.0

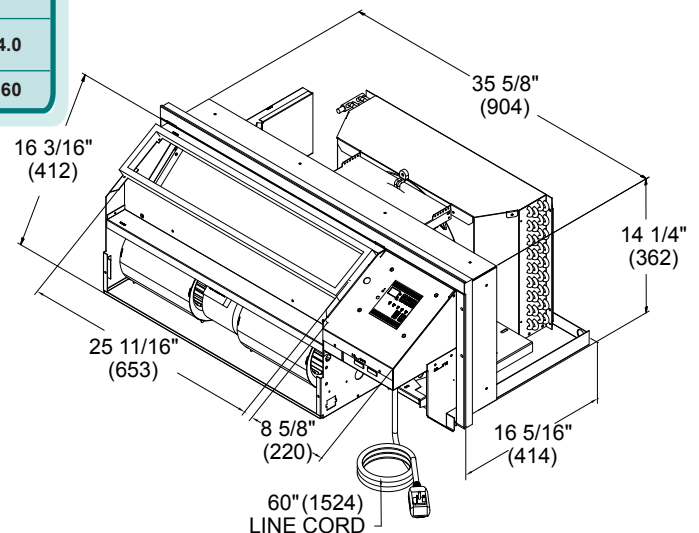


WALL SLEEVES

PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
2400600-00	EZG3 Wall Sleeve Assembly, Standard. Custom colors and sizes are available (consult factory).	50 lbs.	16.75"	38.50"	16.00"




ENCLOSURES

PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
4081160-00	EZG3 Sloped Enclosure Assembly, Custom	35 lbs.	8.548"	38.00"	15.943"



LOUVERS

PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
6070276	EZG3 Exterior Architectural Louver, Standard	10 lbs.	1.164"	37.500"	15.500"




THERMOSTATS

PART NUMBER	DESCRIPTION	APPROX WT.	FEATURES		
			CONNECTION	STAGE	DISPLAY
6041206	Islandaire Non-Programmable, 2 Fan Speed	1.0 lbs.	Wireless	Single	Horizontal
6041210	Islandaire Programmable, 2 Fan Speed	1.0 lbs.	Wireless	Single	Horizontal
6041228	Islandaire Programmable (7 Day/5-1-1 Day/ Non-Programmable), Two Fan Speed	1.0 lbs.	Wired	Single	Horizontal
6041373	Islandaire Wireless, WiFi Programmable	1.0 lbs.	Wireless	Single	Horizontal



FILTERS

PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
6080000	EZG3 Standard Filter	2 lbs.	.250"	30.75"	8.50"



**Ask your salesman about
our DR. PTAC option!***




*100% conditioned
fresh air

EZ Series VH Unit Available

*Vertical Water Source Hybrid Heat
Pump, Replacement For:*

CGC InnKeeper/HomeKeeper



Scan for more information

500 Middle Country Road, St. James, NY 11780 • 1-800-886-2759

e-mail: sales@islandaire.com • www.islandaire.com

Ph: 631-471-2900 • Fax: 631-471-2913



Locally Represented By: