


Islandaire EZPD Series is our 42" x 16" new construction model and a replacement for any 42" x 16" unit with hydronic heat. We can replace the McQuay PDNS and PDAN and the Amana and Trane hydronic Heat PTAC. Our commercial duty construction with heavy gauge galvanized steel and superior components create an efficient, reliable unit. This design eliminates the need for any interior or exterior renovation. Use of the existing wall sleeve-cabinet and louver saves time and money, two very important factors in today's competitive environment! If the need does occur where the wall sleeve-cabinet and/or louver needs to be replaced, we manufacture these accessories as well. Hydronic coils, valves etc. are available.




FEATURES

- Proudly Assembled in the U.S.A.
- ETL listed products
- Superior Energy Efficiency Ratios (EERs)
- Commercial Duty Construction with Heavy Gauge Galvanized Steel
- Designed for exact replacement of existing sleeve opening
- Energy Efficient Rotary Compressors
- High-Efficiency Refrigeration Coils
- Used to Provide Superior Heat Transfer
- Units Available as Cooling only, Cooling with Electric Heat, Cooling with Hydronic Heat
- Custom Options Available
- Available with wired and wireless wall thermostats
- NYC MEA Number 358-93-E Vol. II

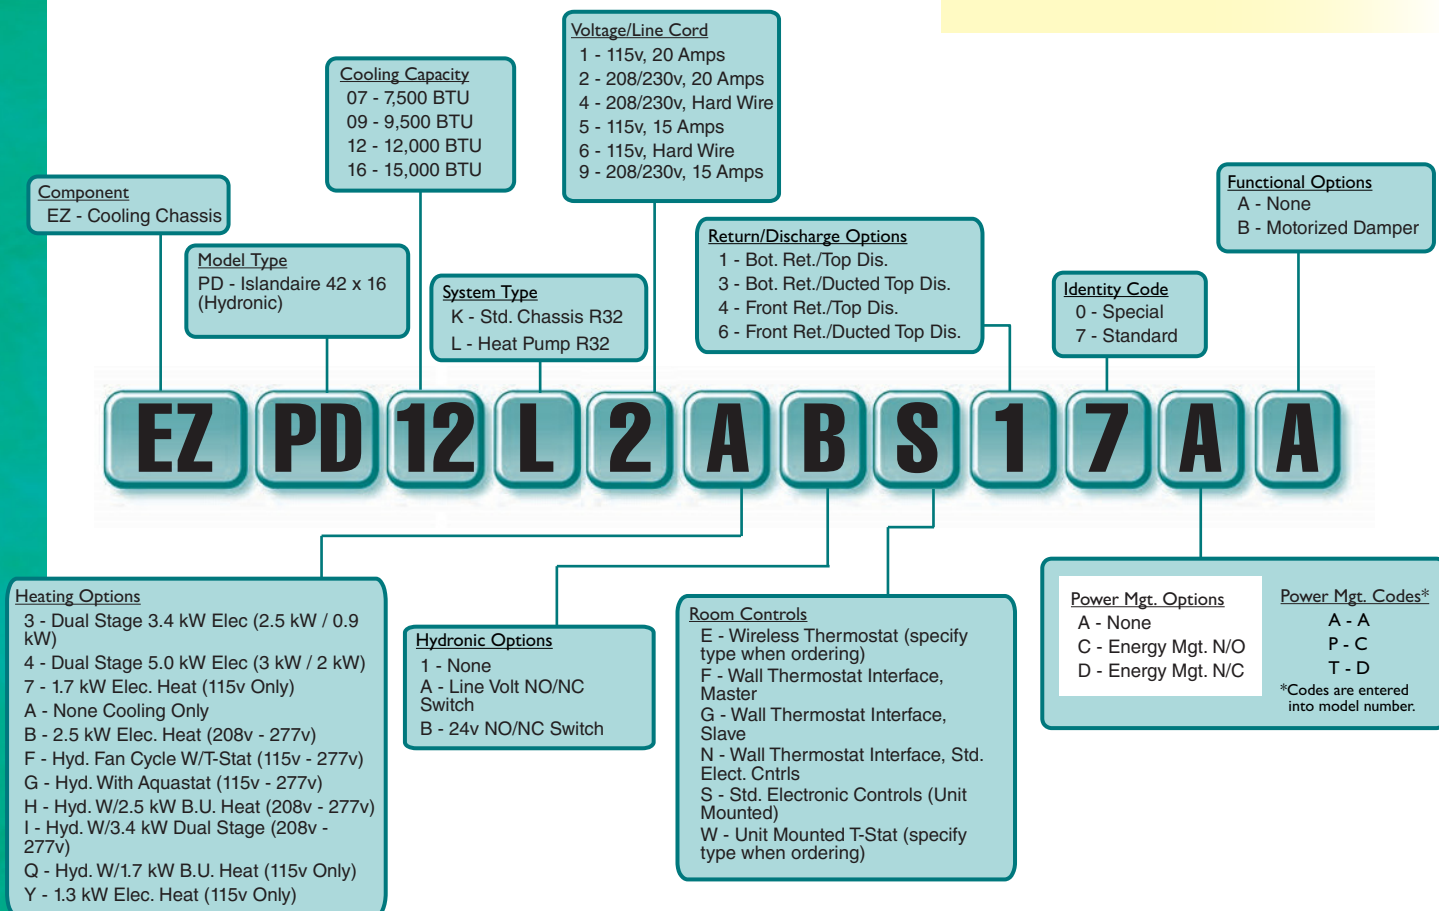

*Specifications are subject to change due to ongoing product development.

6140624 Rev. - (02/21/25)

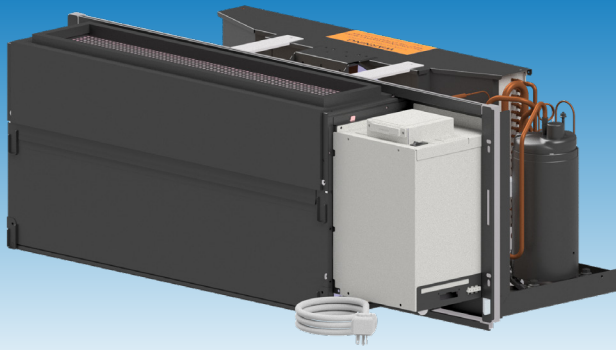

MODELS

	EZ07		EZ09		EZ12		EZ16
VOLTS	115	208/230	115	208/230	115	208/230	208/230
BTUH COOL	8,200	7,300/7,300	9,500	9,000/9,200	12,000	11,900/12,000	15,000/15,000
AMPS COOL	6.7	2.7/2.5	7.1	3.5/3.3	9.0	4.8/4.4	7.1/6.6
WATTS COOL	770	560/570	820	735/750	1,000	990/1,050	1,470/1,510
EER	11.7	13.2/13.0	11.6	12.4/12.4	12.0	11.9/11.8	10.3/10.0
CFM HIGH COOL	350	350/350	370	340/375	400	340/400	430/430
CFM LOW COOL/HEAT	260	240/260	260	240/260	260	240/260	240/260
BTUH HEAT	7,600	6,000/6,000	8,300	7,800/7,900	10,500	10,500/10,700	13,200/13,500
AMPS HEAT	5.9	2.4/2.2	6.5	3.1/2.9	7.8	4.4/4.1	5.9/5.7
WATTS HEAT	675	490/505	750	650/675	900	905/950	1,235/1,310
COP	3.3	3.6/3.5	3.3	3.5/3.4	3.4	3.4/3.3	3.1/3.0

* CFM values are dry coil (not in cooling mode).


Where applicable, cooling capacities are specified at conditions of 95 °F DB/75 °F WB (35 °C DB/24 °C WB) outdoor and 80 °F DB/67 °F WB (27 °C DB/19 °C WB) indoor and heating capacities are specified at conditions of 47 °F DB/43 °F WB (8 °C DB/6 °C WB) outdoor and 70 °F DB/60 °F WB (21 °C DB/16 °C WB) indoor in accordance with AHRI 310/380 and CSA C744 standards. Wattage, Amperage, EER, and COP listings include compressor, evaporator motor and condenser fan motor. The above ratings are a typical heat pump style unit.

Heating Option	Voltage (1)	Wattage	BTU/h	Amps (2)
H	208	2,045	7,000	9.83
	230	2,500	8,500	10.87
I	208	2,945	10,000	14.15
	230	3,600	12,300	15.65

(1) Voltage is Single Phase, Alternating Current and R.M.S.

(2) Amp values are for heating element only.


Line Voltage	Maximum Amperage	Wall Socket Configuration	Receptacle Number	Electrical Heat Options
115	12		NEMA 5-15R	1.3
115	16		NEMA 5-20R	1.7
208/230	12		NEMA 6-15R	2.5
208/230	16		NEMA 6-20R	3.6
208/230	24		NEMA 6-30R	4.2 - 5.0

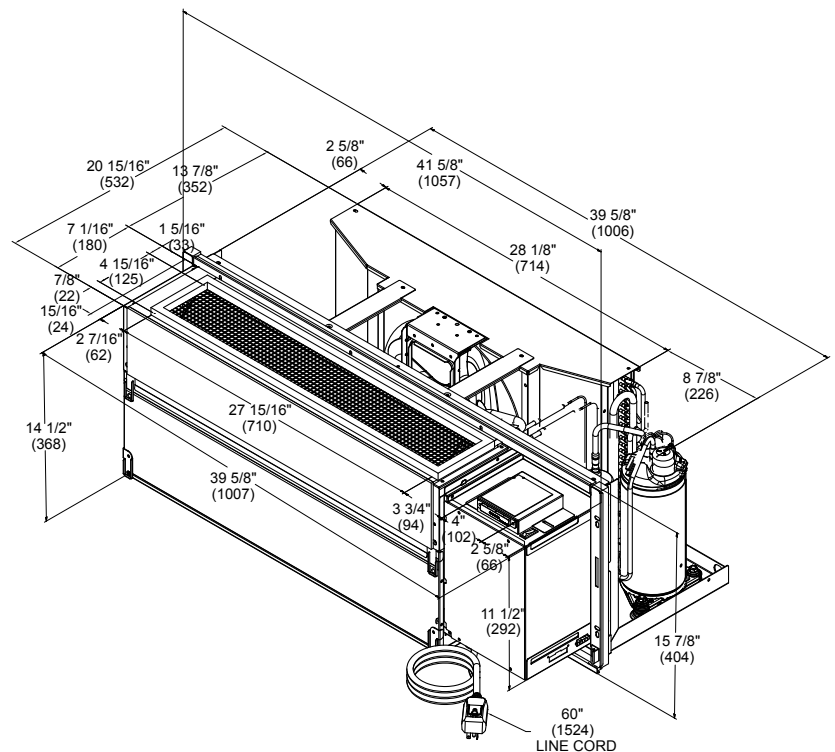

ENCLOSURES


PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
4082330	EZPD Enclosure Assembly *	45 lbs.	9.00"	52.00"	21.00"
4082331	EZPD Enclosure Assembly *	45 lbs.	10.00"	52.00"	21.00"
4082332	EZPD Enclosure Assembly *	45 lbs.	11.00"	52.00"	21.00"
4082333	EZPD Enclosure Assembly *	45 lbs.	12.00"	52.00"	21.00"
4082334	EZPD Enclosure Assembly *	45 lbs.	13.00"	52.00"	21.00"
4082335	EZPD Enclosure Assembly *	45 lbs.	14.00"	52.00"	21.00"
4082336	EZPD Enclosure Assembly *	45 lbs.	15.00"	52.00"	21.00"
4082337	EZPD Enclosure Assembly *	45 lbs.	16.00"	52.00"	21.00"
4082338	EZPD Enclosure Assembly *	45 lbs.	17.00"	52.00"	21.00"
4082339	EZPD Enclosure Assembly *	45 lbs.	18.00"	52.00"	21.00"
4082373	EZPD Enclosure Assembly *	45 lbs.	19.00"	52.00"	21.00"
4084948	EZPD Enclosure Assembly *	45 lbs.	20.00"	52.00"	21.00"

* Custom colors and sizes are available (consult factory).




WALL SLEEVES

PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
Consult Factory	Custom Wall Sleeves available for all building types/wall thicknesses	-	-	-	-
2400405-00	EZPD Wall Sleeve Assembly, Standard	34 lbs.	15.00"	42.00"	16.00"
2401135-00	EZPD Wall Sleeve Assembly, Break Down	33 lbs.	13.75"	42.00"	16.00"
4092502	Kit, Acoustic Insulation for Sleeve 2401135-00	1.35 lb.	1.000"	40.375"	13.000"
4090339-00	EZPD Wall Sleeve Extension Kit	5 lbs.	2.000"	42.00"	16.00"

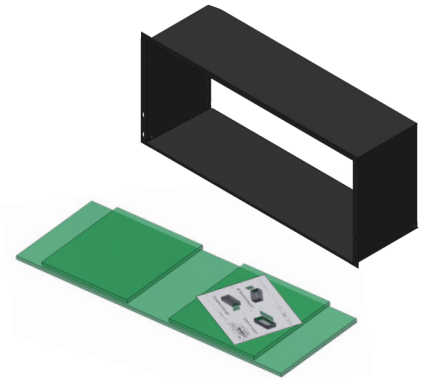


HYDRONIC OPTIONS

PART NUMBER	DESCRIPTION	APPROX WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
6030261	Hydronic Coil Assembly, Top Mount, Same End, Standard	10 lbs.	1.410"	40.192"	5.000"
6030245	Hydronic Coil Assembly, Top Mount, Opposite End, Standard	10 lbs.	1.750"	40.822"	5.000"
6030390	High-Capacity Hydronic Coil Assembly	10 lbs.	1.410"	39.642"	6.000"



LOUVERS

PART NUMBER	DESCRIPTION	APPROX. WT.	DIMENSIONS		
			DEPTH	WIDTH	HEIGHT
6070264	EZPD Stamped Louver, Formed, Standard (use with 2401135-00 wall sleeve)	5 lbs.	1.063"	41.00"	15.50"
6070422	EZPD Architectural Louver, External, Standard (use with 2401135-00 wall sleeve)	7 lbs.	1.125"	42.00"	15.90"
6070134	EZPD Louver, Recessed (use with 2400405-00 wall sleeve)	7 lbs.	1.125"	41.50"	15.50"

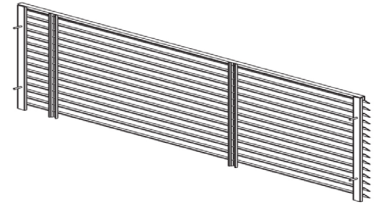

THERMOSTATS

PART NUMBER	DESCRIPTION	APPROX. WT.	FEATURES		
			CONNECTION	STAGE	DISPLAY
6041206	Islandaire Non-Programmable, 2 Fan Speed	1.0 lbs.	Wireless	Single	Horizontal
6041210	Islandaire Programmable, 2 Fan Speed	1.0 lbs.	Wireless	Single	Horizontal
6041228	Islandaire Programmable (7 Day/5-1-1 Day/Non-Programmable), Two Fan Speed	1.0 lbs.	Wired	Single	Horizontal
6041373	Islandaire Wireless, WiFi Programmable	1.0 lbs.	Wireless	Single	Horizontal



OTHER OPTIONS

PART NUMBER	DESCRIPTION	APPROX. WT.	FEATURES
Consult Factory	Motorized Valves (consult factory)	3 lbs.	-
Consult Factory	Flow Restrictors (consult factory)	<1 lb.	-
4090572	Hydronic Coil Freeze Protection Thermostat (N.O. Valve Required)	2 lbs.	-
4090661	Drain Kit	2 lbs.	-



**Ask your salesman about
our DR. PTAC option!***




*100% conditioned
fresh air

EZ Series VH Unit Available

Vertical Water Source Hybrid Heat
Pump, Replacement For:

CGC InnKeeper/HomeKeeper



Scan for more information

500 Middle Country Road, St. James, NY 11780 • 1-800-886-2759

e-mail: sales@islandaire.com • www.islandaire.com

Ph: 631-471-2900 • Fax: 631-471-2913



Locally Represented By: